

# Quick-Lift Rail

QLR 125i

**Intelligent lifting device which meets the highest standards of ergonomics, working environment, safety and efficiency.**

Easy to use, thanks to outstanding responsiveness, regardless of load weight.

Exceptional safety is achieved using our intelligent control systems.

The best auto balancing available, regardless of load weight.

High cost efficiency through low power consumption, high reliability and long durability.






**BINAR**

*Improving your productivity*

# Quick-Lift Rail

# QLR 125i

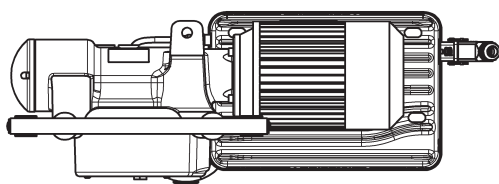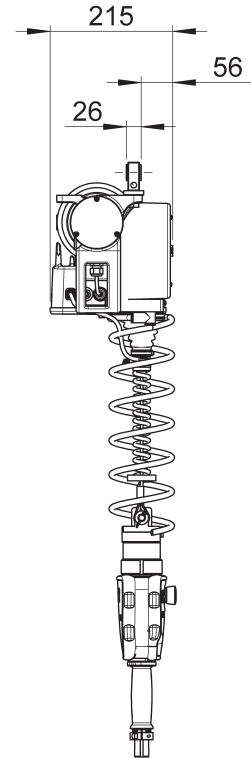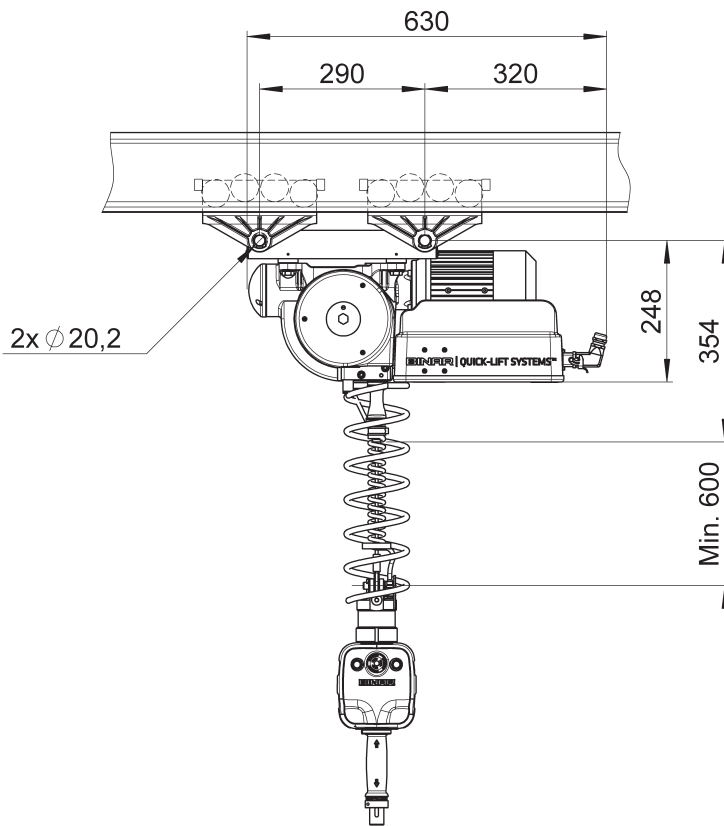

## TECHNICAL DATA QLR 125i

<b>Lifting capacity</b>	Max 125 kg
<b>Lift motor</b>	Stepless servo-controlled asynchronous motor
<b>Weight</b>	28 kg
<b>Manoeuvring</b>	<p>Manoeuvring is done by using a patented manoeuvring handle or balancing mode. Both options sense the operator's hand/arm movement and give a very exact and smooth speed control.</p> <p>Only a small force is needed to engage the up/down motion. When the operator let go of the handle, the up/down motion is immediately stopped.</p>
<b>Power supply</b>	230V, 50-60 Hz, 1-phase with ground protection, 10A
<b>Stroke length</b>	2,7 meter
<b>Suspension</b>	The QLR 125i can be mounted in the most types of rail systems. Existing rail systems can often be used.
<b>Gripping device</b>	Grippers are designed to fit customer's need. Intelligent I/O signals are available for optimum functionality.

Binar Quick-Lift Systems AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

### Binar Quick-Lift Systems AB

Box 2014 • SE-461 11 TROLLHÄTTAN • Sweden  
 ph +46 (0)520 47 40 00 • e-mail info@binar.se  
 web www.binarquicklift.com

2017-06-27 eng 2.0

**BINAR**  
*Improving your productivity*